


产品介绍》

DfMcNH系列
N型单晶硅光伏双玻组件
N-Mono crystalline
Double Glass
Solar Module
560/565/570/575/580W

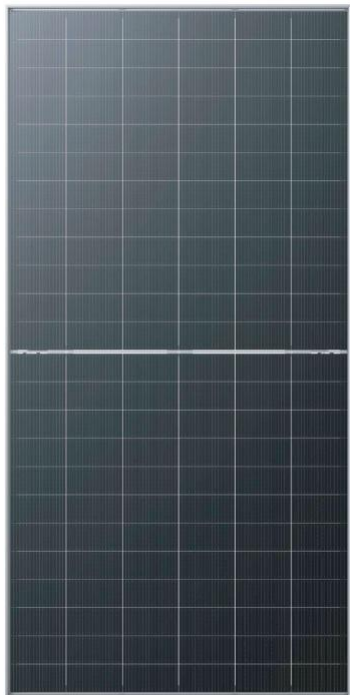

高转换率 High Efficiency

采用先进的制造工艺的太阳能电池，组件转换效率最高可达22.5%
 Advanced solar cell technology ensures, The high module efficiency up to 22.5%.



正公差保证 Positive Tolerance

0 ~ +5W的组件功率保证
 Module guarantees a positive -only power tolerance of 0 to +5w to bring extra benefit.



出色的承载能力 Strong Load Capacity

组件通过了高达2400Pa风载以及5400Pa雪载的认证检测
 Module is capable to withstand 2400Pa wind loads and 5400Pa Snow loads.




可靠的产品质量 Reliable quality

产品制造符合ISO9001国际质量管理体系
 Module is manufactured in accordance with international quality standards ISO9001



优异的防护性能 Higher Weatherproof Rating


接线盒提供高达IP68的防护等级
 J-Box performs module with an environmental protection rating to IP68.

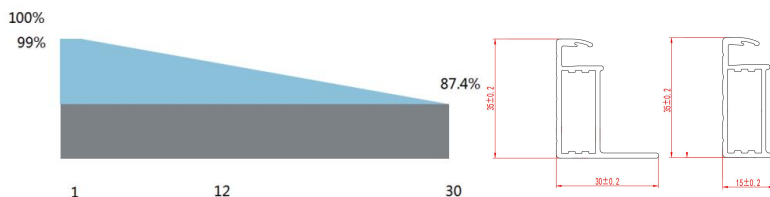


线性输出功率保证 Linear output power guaranteed

12年产品质保 12 year product warranty

30年线性输出功率保证 30years linear power output

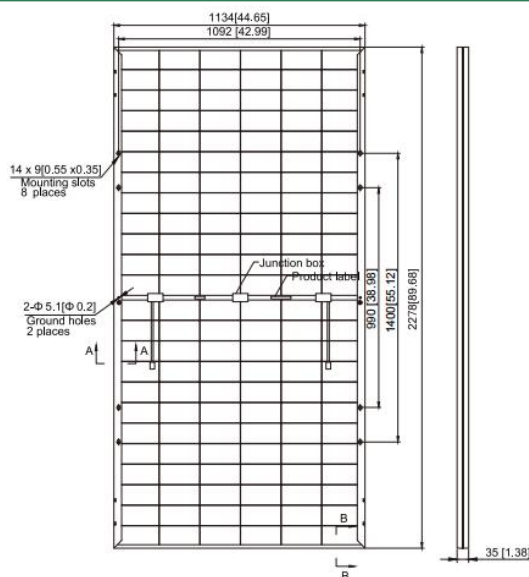

Current-Voltage & Power-Voltage Curve
 (GEP-DfMc580NH)

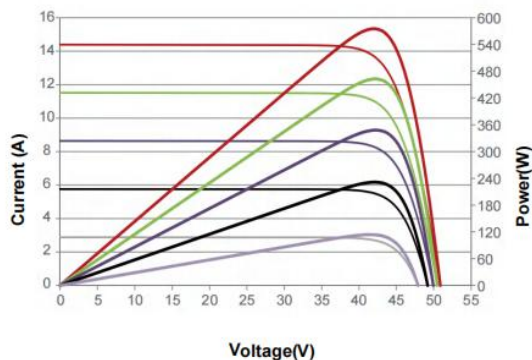

电气参数Electrical Characteristics

标准测试条件 (STC)	GEP- DfMc560NH	GEP- DfMc565NH	GEP- DfMc570NH	GEP- DfMc575NH	GEP- DfMc580NH
最大功率 (Pmax) Maximum Power (Pmax)	560W	565W	570W	575W	580W
功率公差 Tolerance of power	0/+5W				
最大功率点的工作电压(Vmp) Maximum Power Voltage(Vmp)	43.38V	43.53V	43.68V	43.83V	43.98V
最大功率点的工作电流(Imp) Maximum Power Current(Imp)	12.91A	12.98A	13.05A	13.12A	13.19A
开路电压(Voc) Open Circuit Voltage(Voc)	51.17V	51.33V	51.48V	51.64V	51.79V
短路电流(Isc) Short Circuit Current (Isc)	13.50A	13.57A	13.64A	13.71A	13.78A
组件效率 Module Efficiency	21.7%	21.9%	22.1%	22.3%	22.5%
组件工作温度 Operating module Temperature	- 40°Cto +85°C				
最大系统电压 Maximum system(DC) Voltage	DC1500V(IEC)				
最大保险丝额定电流 Series Fuse Rating	30A				
额定电池工作温度(NOCT)* NOCT*	42±2°C				
最大功率温度系数 Temperature Coefficients of Pmax	- 0.30%/°C				
开路电压温度系数 Temperature Coefficients of Voc	- 0.25%/°C				
短路电流温度系数 Temperature Coefficients of Isc	+ 0.046%/°C				

机械参数 MECHANICAL CHARACTERISTICS

电池类型 Solar Cell	N型单晶182×91mm 16主栅线 N-Mono crystalline 182×91mm16BB
电池数量 Number of cells	144 (6×24)
组件尺寸 Dimensions	2278×1134×35mm (89.69×44.65×1.38英寸 inches)
重量 Weight	32.3Kg (71.21磅 lbs)
前玻璃 Front Glass	2.0mm (0.08英寸 inches) 钢化玻璃 front glass
后玻璃 Back Glass	2.0mm (0.08英寸 inches) 打孔玻璃 back glass
边框 Frame	阳极氧化铝合金 Aanodized aluminum alloy
接线盒 Junction Box	IP68防护等级 rated
电缆 Cable	4mm²光伏电缆 solarcable 300mm(11.81英寸 inches) 客户定制长度 customized length
接插头 Connector	MC4 PV-XT101.1/Z4S-abcde
双面率 Double-sided factor	80%±5%

包装方式PACKING CONFIGURATION

	40HC
单托组件数量 Pieces per pallet	31
托盘数 pallets per container	20
组件总数 Pieces per container	620

注意 NOTE :
1.产品设计或具体规范参数如有更改, 恕不另行通知。Design and specifications are subject to chane without prior notice.
2.请参阅组件安装手册或联系我们以保障产品的正确安装与使用。Refer to the installation and operating manual or contact Green energy power Renewable for detailed information on approved installation and use of this product.